

Polycarbonate insulated copper tube crimping lug, 1.5 - 2.5mm²

Type P-M, for copper conductors, EN 45545-2

Item number: P06-M3.5


Packing unit: 100



TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW008A)
Surface:	Electrolytically tinned
Wire section (mm ²):	1.5 - 2.5
Bolt (Ø):	3.5
Inspection hole:	Yes
Colour:	Blue
Fire protection class DIN EN 45545-2:	R22:HL1/HL2 R23: HL1/HL2/HL3
Flammability rating UL 94:	UL94 - V0
Operating temperature (°C):	-20 - +115
Max. temperature (°C):	+130
Manufacturer:	Cembre Group

DIMENSIONS

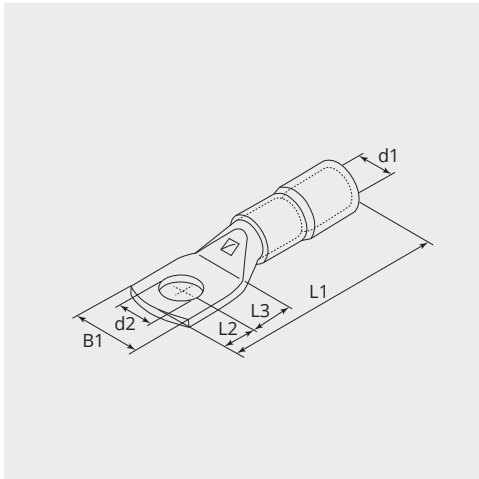

DIMENSIONS

L1 (mm):	22.6
L2 (mm):	3.5
L3 (mm):	4.5
B1 (mm):	6.5
d1 (Ø):	4.9
d2 (Ø):	3.7

NOTE

- Each connector is marked as follows: Company logo and cross-section (mm²)