

Polyvinylchloride PVC insulated terminal CU, 0.25 - 1.5mm²

Type F, for copper conductors, ring terminal


Item number:	RF-M10
Product weight (kg):	0.0135 kg
Packing unit:	100



TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW004A)
Surface:	Eletrolytically tinned
Wire section (mm ²):	0.25 - 1.5
Wire section (AWG/MCM):	22 - 16
Bolt (Ø):	10
Colour:	Red
Flammability rating UL 94:	V0
Operating temperature (°C):	-20 - +80
Max. temperature (°C):	+90
Manufacturer:	Cembre Group

DIMENSIONS

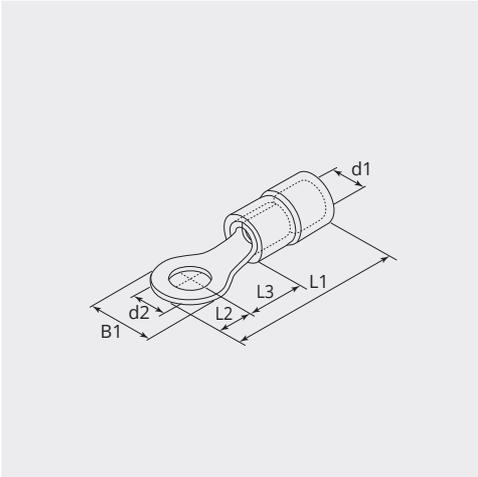

DIMENSIONS

L1 (mm):	30.9
L2 (mm):	7.7
L3 (mm):	13.0
B1 (mm):	15.5
d1 (Ø):	3.9
d2 (Ø):	10.5