

Polyvinylchloride PVC insulated terminal CU, 0.25 - 1.5mm²


Type F, for copper conductors, ring terminal

Item number:	RF-M3.5-1	
Packing unit:	100	
   		

TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW004A)
Surface:	Eletrolytically tinned
Wire section (mm ²):	0.25 - 1.5
Wire section (AWG/MCM):	22 - 16
Bolt (Ø):	3.5
Colour:	Red
Flammability rating UL 94:	V0
Operating temperature (°C):	-20 - +80
Max. temperature (°C):	+90
Manufacturer:	Cembre Group

DIMENSIONS

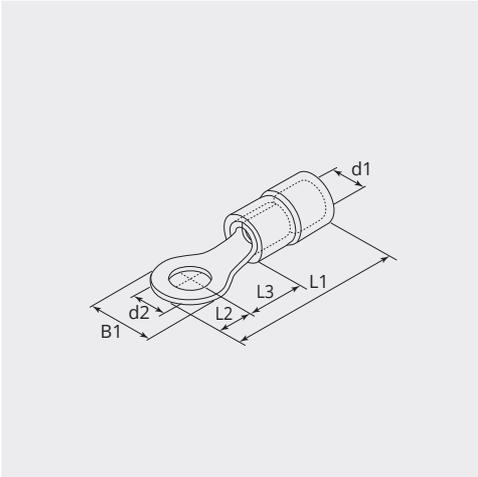

DIMENSIONS

L1 (mm):	20.3
L2 (mm):	3.1
L3 (mm):	7.1
B1 (mm):	6.2
d1 (Ø):	3.9
d2 (Ø):	3.7