

# Polyvinylchloride PVC insulated terminal CU, 0.25 - 1.5mm<sup>2</sup>


Type F, for copper conductors, ring terminal

Item number:	RF-M8	
Packing unit:	100	
   		

## TECHNICAL CHARACTERISTICS

Material:	ETP copper (CW004A)
Surface:	Eletrolytically tinned
Wire section (mm <sup>2</sup> ):	0.25 - 1.5
Wire section (AWG/MCM):	22 - 16
Bolt (Ø):	8
Colour:	Red
Flammability rating UL 94:	V0
Operating temperature (°C):	-20 - +80
Max. temperature (°C):	+90
Manufacturer:	Cembre Group

## DIMENSIONS

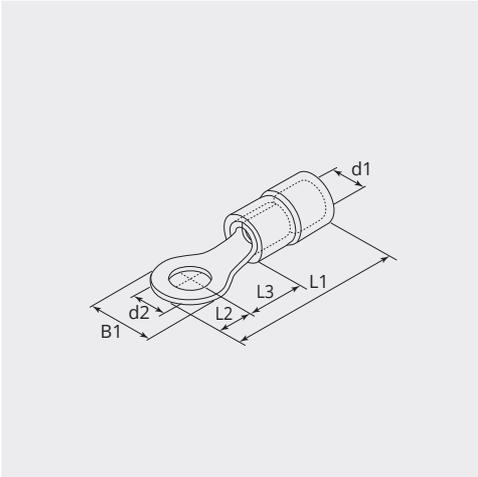

## DIMENSIONS

L1 (mm):	26.4
L2 (mm):	6.0
L3 (mm):	10.3
B1 (mm):	12.0
d1 (Ø):	3.9
d2 (Ø):	8.4