

# Copper tube crimping lug 90°, V-Serie, 35mm<sup>2</sup>


Type T-L, for compacted stranded conductors according VDE 0295 (EN 60228) class 2

|                                                                                                                                                                                                                                                             |                                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <p><b>Item number:</b> T35-L6</p> <p><b>Packing unit:</b> 50</p>                                                                                                                                                                                            |  |
| <p>  </p> |                                                                                     |

## TECHNICAL CHARACTERISTICS

|                                                  |                         |
|--------------------------------------------------|-------------------------|
| <b>Material:</b>                                 | ETP copper (CW008A)     |
| <b>Surface:</b>                                  | Electrolytically tinned |
| <b>Wire section (mm<sup>2</sup>):</b>            | 35                      |
| <b>Wire section thin wires (mm<sup>2</sup>):</b> | 35                      |
| <b>Bolt (Ø):</b>                                 | 6                       |
| <b>Inspection hole:</b>                          | Yes                     |
| <b>Manufacturer:</b>                             | Cembre S.p.A.           |

## DIMENSIONS

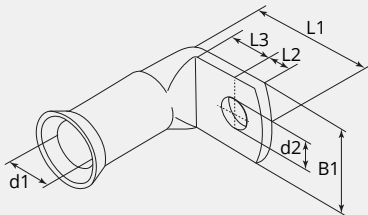

## DIMENSIONS

|          |      |
|----------|------|
| L1 (mm): | 29.5 |
| L2 (mm): | 8.0  |
| L3 (mm): | 9.0  |
| B1 (mm): | 15.0 |
| d1 (Ø):  | 7.9  |
| d2 (Ø):  | 6.4  |

## Note

· L1 = dimension indicative

· Each connector is marked as follows: Company logo and product description, conductor cross-section (mm<sup>2</sup>) and pin Ø (mm)